

# Lithium Battery ES-24100

**EverExceed**<sup>®</sup>  
power your applications

## Key Features

- ◆ **Longer Cycle Life:** Offers up to 10 times longer cycle life and five times longer float/calendar life than a lead-acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- ◆ **Faster charge:** Can fully charge the battery within 2 hours;
- ◆ **Lighter Weight:** About 40% of the weight of a comparable lead-acid battery. A 'drop in' replacement for lead-acid batteries.
- ◆ **Higher Power:** Delivers twice the power of the lead-acid battery, even high discharge rate, while maintaining high energy capacity.
- ◆ **Wider Temperature Range:** -20°C to +60°C.
- ◆ **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging, or short circuit situations.
- ◆ **Increased Flexibility:** This model can easily replace similar capacity lead acid battery without any extra hassle.

## Application

- ◆ Energy storage system
- ◆ Solar application
- ◆ Telecom application
- ◆ Emergency lighting
- ◆ Medical equipment



Best quality lithium battery for energy storage application in best prices.



More than 3000 life cycles in 100% DOD greatly saves TCO



ES-24100


Battery Model	ES-24100
Battery Technology	LiFePO4
Nominal Voltage	25.6V
Nominal Capacity	100Ah
Nominal Energy	2.56KWh
Dimension (WxDxH)	483x400x133mm
Weight	28Kg
Boost Charge Voltage	28.8V
Discharge Cut-off Voltage	20-22V
Max Charge Current	100A
Recom. Charge Current	50A
Max Discharge Current	100A
Working Temperature Range	Discharge: -20°C to +60°C Charge: 0°C to +60°C Storage: -20°C to +60°C
Cycle Life	≥3000 Cycles @ 100% DOD @ 25°C
Communication	None
Safety Standard	CE, UN38.3
Design life	15+ years @25°C
Protection	Short circuit, over charge, over discharge, under charge, under discharge, over/under temperature etc.

# Lithium Battery ES-24100


**EverExceed**<sup>®</sup>  
power your applications

## Performance Curve


State of Charge Curve @0.5C 25°C

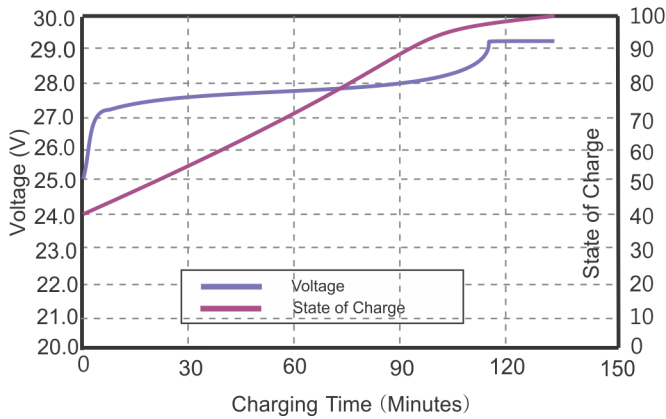


Charging Characteristics @0.5C 25°C

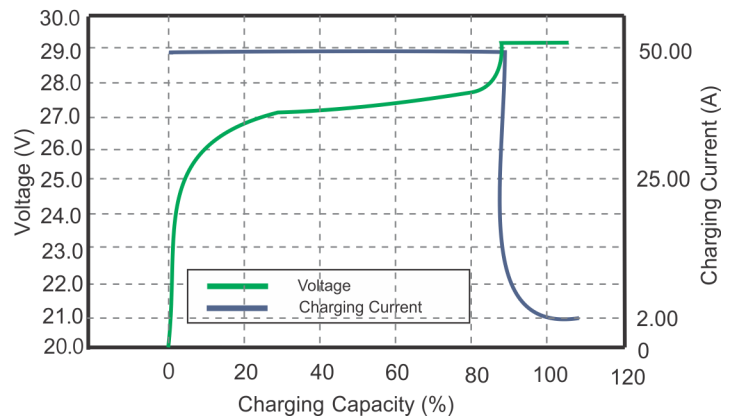


Different Rate Discharge Curve @25°C

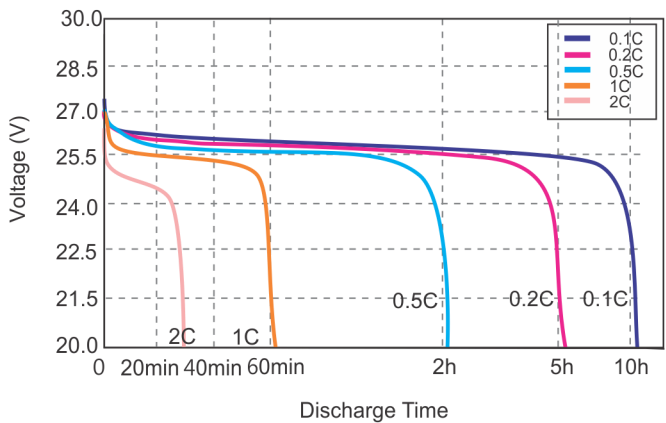

Different Temperature Discharge Curve @0.5C

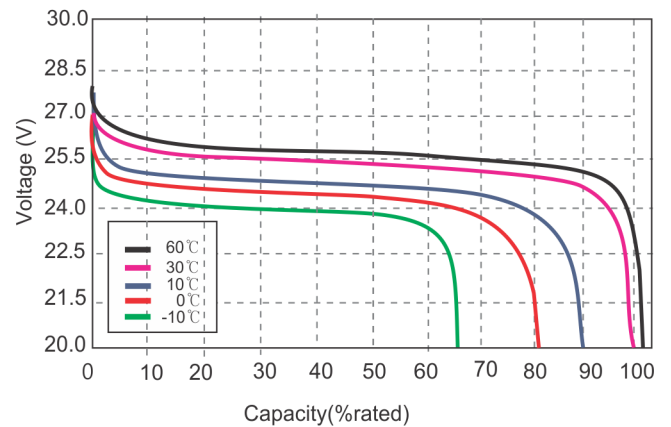

Different DOD Discharge Cycle Life Curve @0.2C

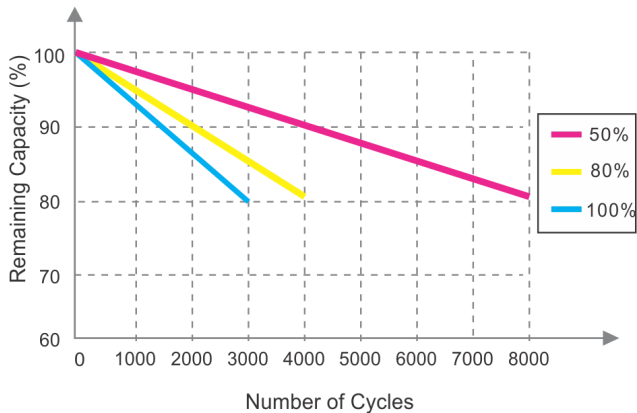

Different Temperature Self Discharge Curve

